

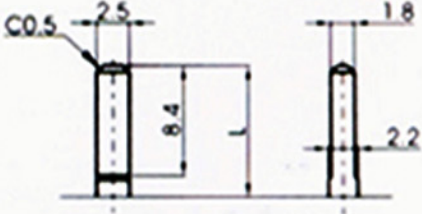


LEVER TYPE

MATERIAL	Insulated lever														
MODEL	C2040N				C1001N					C1001G					
DIMENSIONS															
LENGTH(L)	X	1				X	1	2	3		X	1			
	L	4.5				L	2.5	5	10		L	10			

Mechanical characteristics: 機械的性能 :

Push pull strength 軸推拉強度	25N (2.5kgf)
Operating force 滑動力	0.2 ~ 2N (20 ~ 200gf)
Stopper strength 止擋強度	25N (2.5kgf)

Electrical characteristics: 電氣的性能 :

Total resistance 總阻值		5K Ω ~2M Ω						
Total resistance tolerance 總阻偏差		$\pm 20\%$ more than 1M Ω $\pm 30\%$						
Resistance taper 阻值規律		A, B, C						
Insulation resistance 絕緣電阻		50M Ω min. at 100V DC.						
Withstand voltage 耐電壓		AC 250V (1 minute)						
Rated power 額定功率 (W)	Taper	Travel	10 mm			20 mm		
		B	Single	0.03		0.1		
	Except B (B 以外)	Dual	0.015		—			
		Single	0.015		0.05			
		Dual	0.01		—			
		Single	0.01		—			
Max. operating voltage(AC V) 最高使用電壓	B	Single	100			200		
	Except B (B 以外)	Dual	50			150		
Residual resistance 殘留阻值	Total resistance 總阻值		10K Ω	50K Ω	100K Ω	200K Ω	500K Ω	1M Ω
	Between terminals 1-2 端子 1-2 間		10 Ω	10 Ω	10 Ω	20 Ω	20 Ω	20 Ω
	Between terminals 2-3 端子 2-3 間		10 Ω	10 Ω	20 Ω	20 Ω	50 Ω	50 Ω

Durability:耐久性能:

Slidinglife

滑動壽命

15,000 cycles