
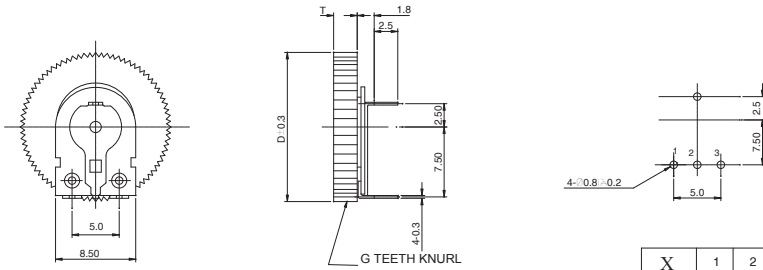

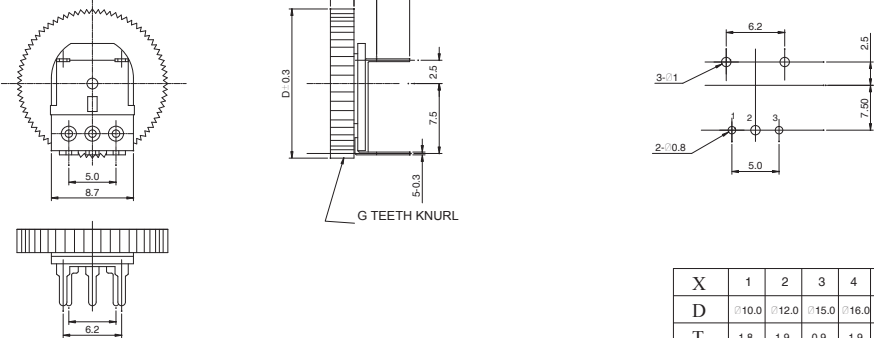


型號

尺寸

<p>S0801N-\square_X D1-</p> 	 <table border="1" data-bbox="1197 672 1436 761"> <thead> <tr> <th>X</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> </tr> </thead> <tbody> <tr> <td>D</td> <td>∅10.0</td> <td>∅12.0</td> <td>∅15.0</td> <td>∅16.0</td> <td>∅20.0</td> </tr> <tr> <td>T</td> <td>1.8</td> <td>1.9</td> <td>0.9</td> <td>1.9</td> <td>3.0</td> </tr> </tbody> </table>	X	1	2	3	4	5	D	∅10.0	∅12.0	∅15.0	∅16.0	∅20.0	T	1.8	1.9	0.9	1.9	3.0
X	1	2	3	4	5														
D	∅10.0	∅12.0	∅15.0	∅16.0	∅20.0														
T	1.8	1.9	0.9	1.9	3.0														
<p>R0801N-\square_X D2-</p> 	 <table border="1" data-bbox="1197 1120 1436 1209"> <thead> <tr> <th>X</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> </tr> </thead> <tbody> <tr> <td>D</td> <td>∅10.0</td> <td>∅12.0</td> <td>∅15.0</td> <td>∅16.0</td> <td>∅20.0</td> </tr> <tr> <td>T</td> <td>1.8</td> <td>1.9</td> <td>0.9</td> <td>1.9</td> <td>3.0</td> </tr> </tbody> </table>	X	1	2	3	4	5	D	∅10.0	∅12.0	∅15.0	∅16.0	∅20.0	T	1.8	1.9	0.9	1.9	3.0
X	1	2	3	4	5														
D	∅10.0	∅12.0	∅15.0	∅16.0	∅20.0														
T	1.8	1.9	0.9	1.9	3.0														
<p>总阻偏差</p>	<p>± 20% (R ≥ 1MΩ : 30%)</p>																		
<p>阻值规律</p>	<p>A B C D</p>																		
<p>残留阻抗</p>	<p>1-2间 20 Ω max</p>																		
<p></p>	<p>2-3间 20 Ω max</p>																		
<p>额定功率</p>	<p>0.3W</p>																		
<p>最高使用电压</p>	<p>50V AC/12V DC</p>																		
<p>绝缘阻抗</p>	<p>100MΩ at 100V DC</p>																		
<p>耐电压</p>	<p>100V AC 1分钟以上</p>																		
<p>动噪音</p>	<p>≤ 100mV (at 20V DC)</p>																		
<p>同步误差</p>	<p>± 4dB (Between -4dB ~ 0dB)</p>																		
<p>全回转角度</p>	<p>220° ± 10°</p>																		
<p>回转力矩</p>	<p>5- 100gf.cm</p>																		
<p>止挡强度</p>	<p>0.6Kg</p>																		
<p>转的推拉强度</p>	<p>0.5Kg</p>																		
<p>使用寿命</p>	<p>> 10,000周</p>																		